


Recommended tools : Tape measure / Screwdriver (PH2) / a good wire cutter for the ropes.

25 years experience of design and production of market leading devices for automatic feeders for horses

Closed gate

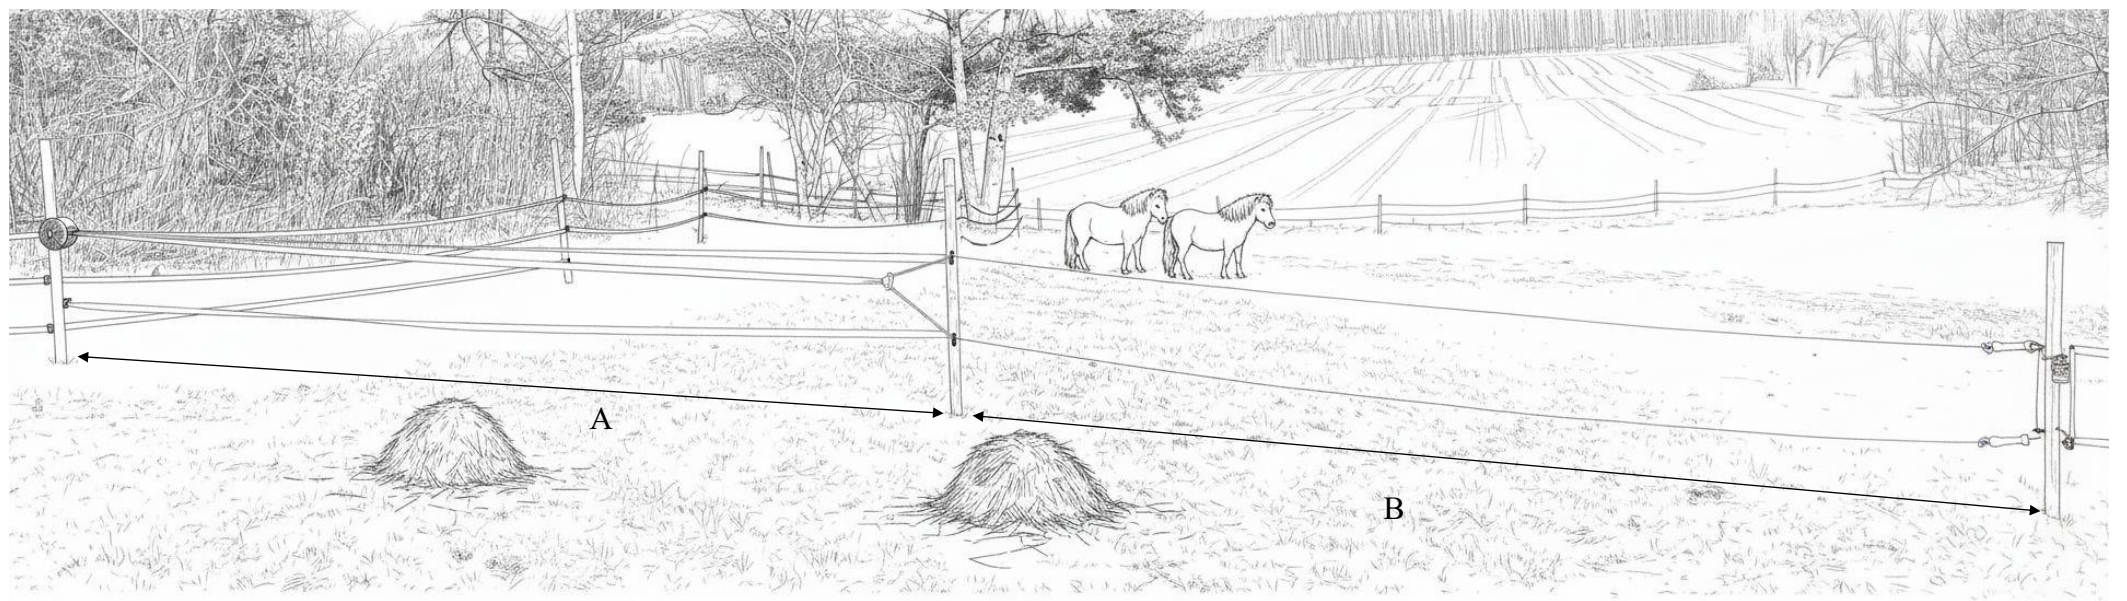

The complete gate needs three fence posts. They should be placed in a straight line. The gate opening (B) can be made up to 6 meters. The distance (A) should be as distance (B) + 0.5 meter.


It is recommended that the pasture layout is as the picture – i.e. fudder, timer and gate opener on one side and the horses on the other. This is to avoid exposing gate parts to the hungry horses as much as possible.

Open gate



Connection of rewriter to gate ropes (middle post)	Mounting of double hook and timer (right post)
When the ropes are mounted as below, and both handles are hooked to the right post - The length of the ropes should be adjusted when tying them to the handles, so that the distance between insulators and steel plate is app 35 cm. Excess rope at the handles is just cut off.	Layout of this right post can not be altered from the picture below. I.e. gate to the left and timer on this side of the post.

Parts list :

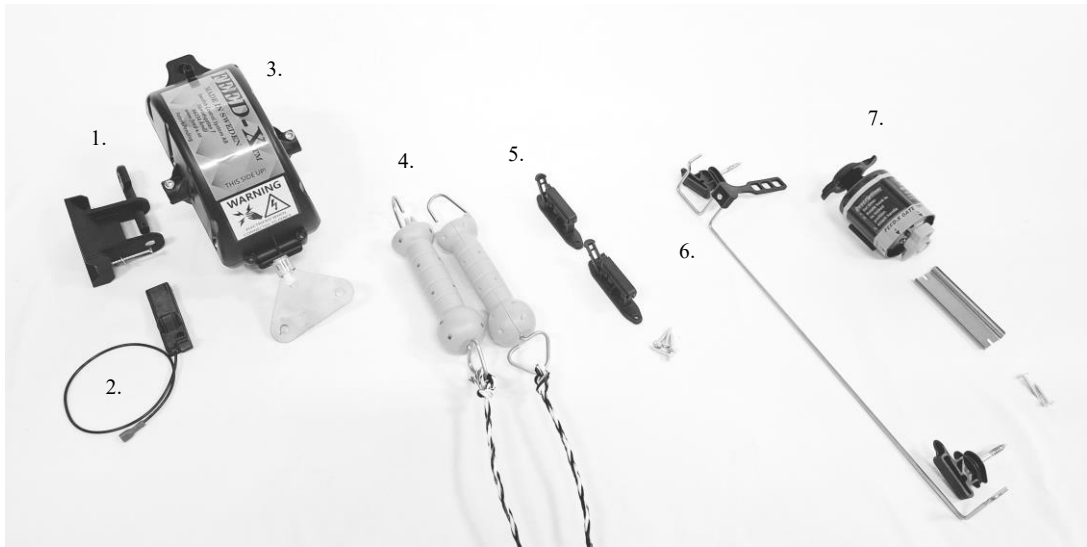

1. Fence post mounting bracket, for rewriter. With pin and mounting screws
2. Clips for connection to electric fence – works for rope and tape. Quick connector to rewriter.
3. Rewinder G6 – 6 meters , extra strong retraction – but with a speed limiter (app 2m/s). It is fitted with a connecting steel plate for attachment to the two ropes.
4. 2 pcs of special lightweight handles. Designed for avoiding getting stuck in vegetation, snow and mud. Ropes included.
5. 2 st “snap lock” Insulators for the ropes. With mounting screws.
6. Double hook arrangement, with insulators and attachment for timer.

Parts not included :

- Timer with mounting rail and screws (7) – Must be ordered separately. Exist in two versions. One up to 6H delay and the other up to 12H delay. GT-6 resp GT-12.
- The three needed fence posts with fence (“normal fence” in the picture labels)

Connection to electric fence

May seem odd that it connects directly to the plastic cover – but the cover itself is made out of a special conductive plastic. This means that the entire device, with electric tape and opening gate will be connected. Main point is that the device will not be sabotaged by any normal horse.

Misc.

More detailed info about the timers GT-6 and GT-12, and also the rewriter G-6 can be found on Your dealers homepage.

Spare parts

Are available from Your local dealer.